




## REINFORCING SUCCESS

**WINFAB 1215DT** is manufactured using high tenacity polypropylene yarns that are woven to form a dimensionally stable network, which allows the yarns to maintain their relative position.

**WINFAB 1215DT** resists ultraviolet deterioration, rotting, and biological degradation and is inert to commonly encountered soil chemicals.

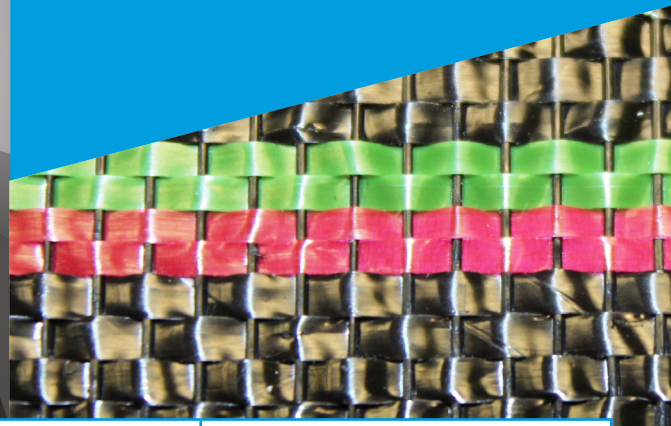

PROPERTY	TEST METHOD	MARV ENGLISH	MARV METRIC
Tensile Strength (Grab)	ASTM D4632	150 x 100 lbs	667 x 445 N
Elongation (Grab)	ASTM D4632	8% x 8%	8% x 8%
UV Resistance (500 hrs)	ASTM D4355	80%	80%
Apparent Opening Size*	ASTM D4751	30 US Std. Sieve	0.60 mm
Permittivity	ASTM D4491	.5 sec <sup>-1</sup>	.5 sec <sup>-1</sup>
Water Flow Rate	ASTM D4491	50 gpm/ft <sup>2</sup>	2,037 lpm/m <sup>2</sup>

\*Maximum Average Roll Valve

PROPERTY	TEST METHOD	TYPICAL ENGLISH	TYPICAL METRIC
Roll Dimensions	Measured	36 in x 500 ft	.91 m x 152.4 m
		36 in x 1000 ft	.91 m x 304.8 m
		36 in x 1500 ft	.91 m x 457.2 m
		42 in x 500 ft	1.07 m x 152.4 m

**Disclaimer:** WINFAB assumes no liability for the completeness or accuracy of this information or the ultimate use of this information. WINFAB disclaims any and all implied, expressed, or statutory standards, guarantees, or warranties. This includes without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to equipment, materials, or information furnished herewith. This document should not be construed as engineering advice. Always consult the project engineer for project specific requirements. The end user assumes sole responsibility for the use of this information and product. The property values listed above are subject to change without notice.

© 2018 WINFAB